



TUV SUD certified quality

LAMILUX High Impact

INNOVATIVE FIBREGLASS SOLUTIONS

PRODUCT DESCRIPTION

LAMILUX High Impact combines outstanding impact resistance and strength with very low weight and an attractive surface that is easy to clean. The combination of a high reinforcement fibre content and a sophisticated special resin makes LAMILUX High Impact ideal for overcoming the exacting requirements of modern industrial applications.

VERSIONS



LAMILUX High Impact

LAMILUX High Impact
AntiBac

LAMILUX HIGH IMPACT IS AVAILABLE


- in thicknesses between 0.8 and 1.6 mm
- in widths up to 3.2 m
- in sheets or coils
- in a range of colours: RAL, NCS scale and customer-specific colours
- with gelcoat surface for maximum resistance to UV rays and weathering
- gelcoat surface also available with antibacterial effect
- in other thicknesses, dimensions and colours, on request
- with different treatments on the back surface (smooth, corona or soft sanded), on request

SPECIFIC PRODUCT ADVANTAGES

- unites the strengths of various construction materials: metal, thermoplastics and thermosetting polymers
- high impact strength yet low weight
- outstanding flexural and tensile strength
- very good resistance to UV rays and weathering
- low thermal expansion coefficient

SECTORS

- Commercial vehicle sector
- Building sector
- Medical and hygiene sector

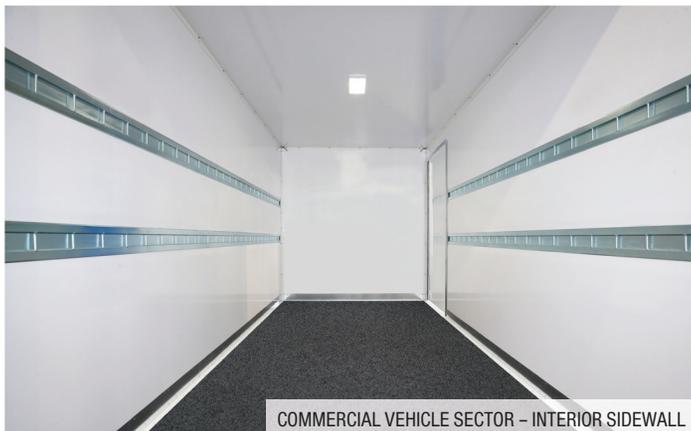

COMMERCIAL VEHICLE SECTOR – INTERIOR SIDEWALL



COMMERCIAL VEHICLE SECTOR – SIDEWALL

The information in this brochure is based on our current knowledge and experience. It is not a guarantee of technical characteristic features in the scope of specifications. Due to the wide range of usage parameters, users themselves are responsible for testing that the product is suitable for their required use. Changes and errors excepted.